

HC-24™


Hematocrit Centrifuge



- 24-place rotor for hematocrit capillary tubes
- 12,000 rpm / 14,328 xg
- Built-in reading disc in lid for instant analysis
- Quick-spin function
- Timer up to 99 mins, continuous



Digital display and control

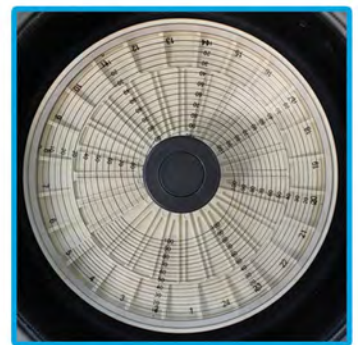

24-place capillary rotor with reading disc lid

The HC-24 is a compact centrifuge designed specifically for hematocrit applications. With an included 24-place rotor for capillary tubes and programmable speed of up to 12,000 rpm (14,328 xg), the centrifuge is ideal for quickly determining hematocrit counts.

The reading disc is conveniently built into the lid allowing for immediate analysis and eliminating the need for separate accessories. The large digital display offers precise control of speed (rpm or rcf) and run time, with a timer range from 20 seconds to 99 minutes.

Engineered for efficiency and ease of use, the HC-24 features rapid acceleration to max speed in under 20 seconds, safe and smooth deceleration in under 30 seconds, and whisper-quiet operation. A convenient quick-spin function adds further convenience to routine workflows.

Technical Data

Speed:	1,000 to 12,000 rpm
Max RCF:	14,328 xg
Timer:	0 to 59 sec / 1 to 99 min., cont.
Capacity:	24 x 75mm capillary tubes
Acc./Decel.:	20 s (Accel.) 30 s (Decel.)
Dimensions: (WxDxH)	14 x 11 x 9.8 in. 36 x 28 x 25 cm.
Weight:	35 lbs / 16 kg
Electrical:	100 to 240V, 50-60Hz, 800W
Warranty:	2 Years

Ordering Information

C3450-H* HC-24 Hematorit Centrifuge with 24-place capillary rotor and reading disc lid

*To order in 230V, add (-E) to the item number.

Benchmark
Scientific

MIDSCI™
Laboratory Equipment & Supplies

ORDER TODAY! midsci.com • custserv@midsci.com • 800.227.9997 • f: 636.225.9998